


WINDOW HOLDING TOOL

Features

- One size fits all doors
- If used properly, won't damage window or tint (for proper usage, see instructions below)
- Easy installation
- Unique solution for a troublesome task

CAUTION

The window holding tool is to be used only to temporarily maintain the position of a window while repairing or replacing a window regulator. Never use the device as a permanent solution or while the vehicle is in motion.

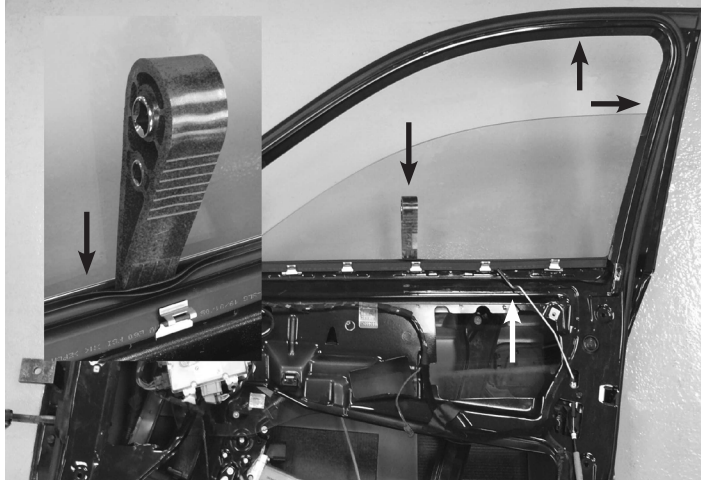

INSTRUCTIONS FOR USE

1. Always exercise caution; improper use of the device may result in bodily injury or damage to property.
2. Always use eye and hand protection. Perform a visual inspection of the window for any damage prior to use. Never use the device on a window that appears to be damaged.
3. Position the window so that the window regulator and window mounting fasteners are accessible. Loosen and/or remove the hardware used to attach the window to the regulator.
4. Raise the window to the necessary height to remove the regulator and insert the window holding tool as shown, in between the window and the door frame or weather stripping at the base of the window. When inserting the device, use sufficient force by hand to cause the device to hold the window firmly in place. Never use a hammer or other tool to force the device into place. Excessive force may result in bodily injury or damage to property. In some applications it may be necessary to remove the two supplied socket tools before inserting the device.
5. If the device is not inserted properly, there is a risk that the window may fall into the door. Always remain mindful of this risk and keep clear of the window and tracks.
6. When you have completed the repair or replacement work, hold the window in place by hand, remove the device and slowly lower the window into the window mounting fasteners and fasten the window to the regulator.